

# SpreaderShield™ Flexible Graphite Cooling Fins

## TECHNICAL DATA SHEET 522

### Product Overview

Next-generation electric automotive and marine batteries will need to charge quickly and have extended lifetimes. For this, they need thermal-management materials that are thin, lightweight, and long lasting. These materials must not only cool the cells under harsh operating conditions but must also prevent propagation in the event of a cell failure. SpreaderShield Flexible Graphite Cooling Fins directly replace thick and heavy aluminum in these lithium ion transportation battery modules, where energy density, specific energy, safety, and performance are critical.

### Applications

In both battery electric vehicles (BEVs) and hybrid electric vehicles (HEVs), traditional thermal management metals, such as aluminum, result in battery modules that are unacceptably thick and heavy. SpreaderShield Flexible Graphite Cooling Fins directly replace aluminum to:

- Extended cell lifetimes
- Enable fast charge/discharge operations
- Prevent propagation in the event of a cell failure


### Application Notes

SpreaderShield Flexible Graphite Cooling Fins are designed for direct aluminum substitution in pouch cell battery module designs. For Fast Charging and Extended Cell lifetimes, a foam pad is typically installed between cells to maintain constant pressure between the graphite and the cell. For Propagation Prevention, an additional high temperature film is typically added to seal each cell, helping prevent the escape of hot gasses. Please consult a NeoGraf Solutions Applications Engineer for more design information.

### Certifications

SpreaderShield Flexible Graphite Cooling Fins are composed exclusively of graphite (carbon) enclosed in thin dielectric PET plastic laminates. As such, they meet all of the common environmental and chemical standards.

- RoHS
- REACH
- UL 94 V-0
- Lead / Halogen Free
- Conflict Free

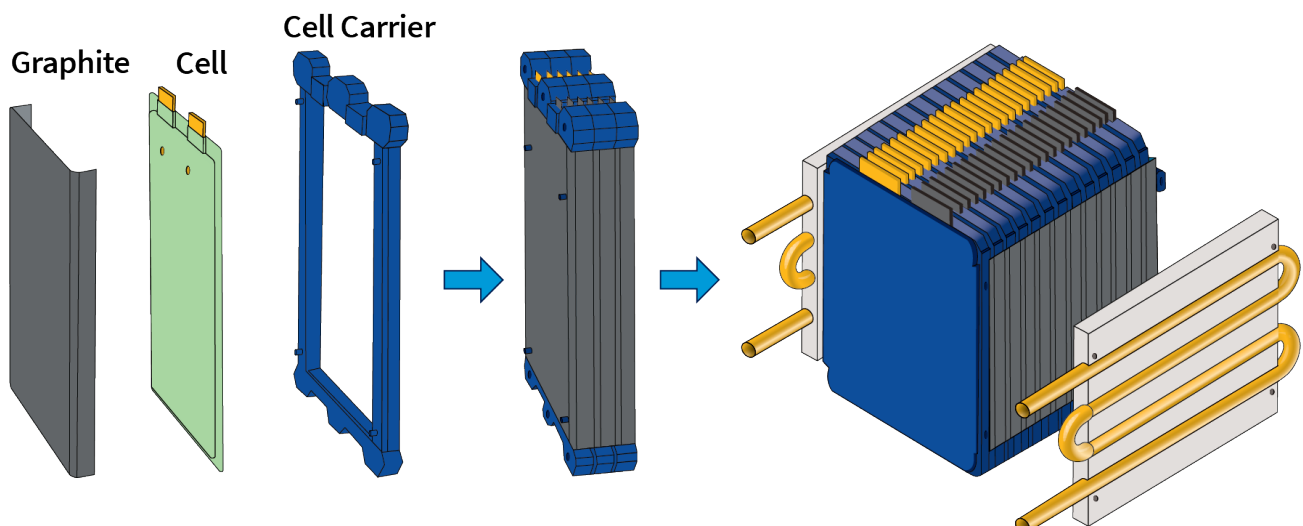

## Typical Properties\*

CHARACTERISTIC	UNIT	SS400	SS500
Product Thickness (Without Coatings)	mm	0.051 – 0.940	0.076 – 0.40
Thermal Conductivity (In Plane)	W/m·K	400	500
Thermal Conductivity (Through Plane)	W/m·K	3.7	2.8
Roll Width	mm	355 – 610	305 – 508
Roll Length	m	33 – 100	33 – 100
Operating Temperature	°C	-40 to +150	-40 to +150
UL Flammability Rating	-	94 V-0 (Non-flammable)	94 V-0 (Non-flammable)
RoHS Compliant	-	Yes	Yes
Lead / Halogen Free	-	Yes	Yes
REACH Compliant	-	Yes	Yes
Conflict Free Mineral	-	Yes	Yes
Dielectric Coatings	-	0.025mm PET plastic on the top and bottom surfaces	0.025mm PET plastic on the top and bottom surfaces
Adhesive Option	-	Pressure Sensitive Acrylic	Pressure Sensitive Acrylic

\* Note:

Properties listed are typical and cannot be used as accept/reject specifications. Please see NeoGraf Solutions Technical Data Sheet 321 and 322 for more information.

## Commitment to Excellence

NeoNxGen is produced in North America and meets or exceeds all environmental and quality standards in a sustainable manner.

- ✓ ISO 9001:2015
- ✓ RoHS
- ✓ California Proposition 65 Compliant
- ✓ Lead-free
- ✓ ISO 14001:2015
- ✓ Conflict-Free Minerals
- ✓ REACH

## Technical Support

Our global team of Applications Engineers specialize in providing technical support to a wide variety of applications, design and modeling for the latest high tech devices, fuel cells, industrial gaskets, fire-rated building materials, and LED lighting. With over 135 years of carbon and graphite innovation and leadership, we specialize in the development and manufacture of high quality flexible natural and synthetic graphite sheets as well as expanded and expandable graphite powders.

Regardless of your product design phase (concept, prototyping, or mass production), we offer technical answers and thermal modeling support to some of your most challenging problems with a fast response time.



Please contact NeoGraf Solutions today at [neograf.com/contact](http://neograf.com/contact).

LEAD. CREATE. CONNECT.

+1 (800) 253.8003 (Toll-Free in USA) | +1 (216) 529.3777 (International)  
[www.neograf.com](http://www.neograf.com) | [info@neograf.com](mailto:info@neograf.com)

©2020 NeoGraf Solutions, LLC (NGS). This information is based on data believed to be reliable, but NGS makes no warranties, express or implied, as to its accuracy and assumes no liability arising out of its use. The data listed falls within the normal range of product properties, but should not be used to establish specification limits or used alone as the basis of design. NGS's liability to purchasers is expressly limited to the terms and conditions of sale. eGRAF®, NeoNxGen™, SPREADERSHIELD™, HITHERM™, GRAFGUARD®, GRAFOIL®, GRAF+® and GrafHX® are registered trademarks of NeoGraf Solutions, LLC. eGRAF®, NeoNxGen™, SPREADERSHIELD™, HITHERM™, GRAFGUARD®, GRAFOIL®, GRAF+® and GrafHX® products, materials, and processes are covered by several US and foreign patents. For patent information visit [www.neograf.com](http://www.neograf.com).