

SPREADERSHIELD™ Design Options

TECHNICAL DATA SHEET 322


Coatings and Adhesives

eGRAF® SPREADERSHIELD™ heat spreader solutions can be designed with or without coatings and adhesives. The table below contains typical coatings and adhesive options available for sampling along with their typical properties. Each option is representative of a family of materials for the purpose of qualifying the performance of the solution, and may or may not be part of the recommended bill of material for the final solution. [For additional product information, please reference Technical Data Sheet 321 - SPREADERSHIELD™ Heat Spreaders.](#)

	COATING OPTIONS				ADHESIVE OPTIONS			
	P1	P22	P0	P7	A1	P1A1	P8A8	P0A0
Description	PET Film Coating	PET Film Coating	PET Film Coating ^[1]	Temporary Liner ^[2]	Acrylic Adhesive ^[3]	PET Film Adhesive ^[3]	PET Film Adhesive ^[3]	PET Film Adhesive ^[3]
Coating Thickness ^[4] (mm)	0.025	0.010	0.005 - 0.008	N/A	0.013	0.030 - 0.038	0.010 - 0.012	0.005 - 0.006
Release Liner Thickness (mm) Type	N/A	N/A	N/A	0.05 PET	0.08 Paper	0.08 Paper	0.05 PET	0.05 PET
Dielectric Strength ^[5] (V)	2,800	600	300	N/A	-	2,800	900	300
Operating Temperature (°C)	-40 to +150	-40 to +150	-40 to +100	-40 to +150	-40 to +150	-40 to +150	-40 to +100	-40 to +100
Thermal Contact Impedance ^[6] (°C•cm ² /W) per side	1.6	0.95	< 0.5	N/A	0.16	-	0.42	< 0.5
Thermal Conductivity Through-Thickness (W/m-K)	0.16	0.16	0.16	N/A	-	0.16	0.16	0.16

Die-Cut Edge Options

In addition to the coating and adhesive options, SPREADERSHIELD™ products are also available with die-cut edge options, as shown in the table to the right. Available edge options are dependent upon the coatings selected and may not be available for all material configurations. Please contact NeoGraf for additional information.

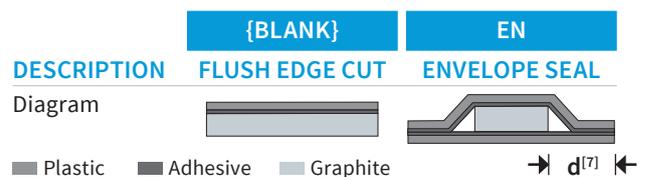

Notes:

- [1] P0 is most often offered in black matte finish.
- [2] P7 is a temporary liner used exclusively to package sheets of synthetic graphite into a continuous roll and must be defined as the bottom coating type ("GP7") for synthetic graphite, if no other coating is specified.
- [3] Adhesive strength of "A1" and "P1A1" are 700 g/cm² and 1100 g/cm² respectively based upon lap shear test ASTM D3163 on a glass plate. Adhesive strength of "P8A8" = 2.64 N/cm per 90° based upon peel adhesion test ASTM D3330 on a glass plate. P0A0 adhesive strength is best represented by a typical 180° peel strength of 5 N/25 mm.

- [4] Coating thickness specified includes adhesive thickness used to bond coatings to graphite.
- [5] ASTM D149-09 Method A.
- [6] ASTM D5470 Modified (at 110kPa/16 psi/1.1 bar). Total thermal impedance = impedance of graphite + impedance of coating.
- [7] Availability and specified envelope edge seal width "d" will vary depending upon graphite thickness and coating selected. Please contact NeoGraf for additional information.

+1 (800) 253.8003 (Toll-Free in USA) | +1 (216) 529.3777 (International)
www.neograf.com | info@neograf.com

©2020 NeoGraf Solutions, LLC (NGS). This information is based on data believed to be reliable, but NGS makes no warranties, express or implied, as to its accuracy and assumes no liability arising out of its use. The data listed falls within the normal range of product properties, but should not be used to establish specification limits or used alone as the basis of design. NGS's liability to purchasers is expressly limited to the terms and conditions of sale. eGRAF®, NeoNxGen®, SPREADERSHIELD™, HITHERM™, GRAFGUARD®, GRAFOIL®, GRAF+® and GrafHX® are registered trademarks of NeoGraf Solutions, LLC. eGRAF®, NeoNxGen®, SPREADERSHIELD™, HITHERM™, GRAFGUARD®, GRAFOIL®, GRAF+® and GrafHX® products, materials, and processes are covered by several US and foreign patents. For patent information visit www.neograf.com.